

Art.-Nr.: 10.06.04.00003



FS 10 D 2NA K

The product is delivered as a ready to connect component.


A 3 m long cable with open strands is included.

Technical data

Attribute	Value
Construction vacuum switch	2x NPN + 1x analog
Electrical connection	Cable
Protection type IP	IP 40 (with plug)
Measuring range	-1...8bar
Connection	G1/8"
Shape	Digital display
Flow in vacuum range	0 ... 10 l/min
Flow in pressure range	0 ... 10 l/min

Design data

Attribute	Value
Length L1	76.20 mm
Length L2	18.50 mm
Length L	55.00 mm
Width B	17.00 mm
Height H1	52.00 mm
Height H2	3.00 mm
Height H	50.00 mm
Internal diameter d1	2.5 mm
d2	3.0 mm
Thread G1	G1/8"-F
Thread G2	G1/8"-F
Key width SW1	17.0 mm
Cable length	2,000.00 mm
Length L3	18.60 mm
Height H3	9.50 mm
Height H4	36.70 mm
Hole spacing Y1	8.0 mm
Hole spacing X1	28.0 mm
Hole spacing X2	18.0 mm

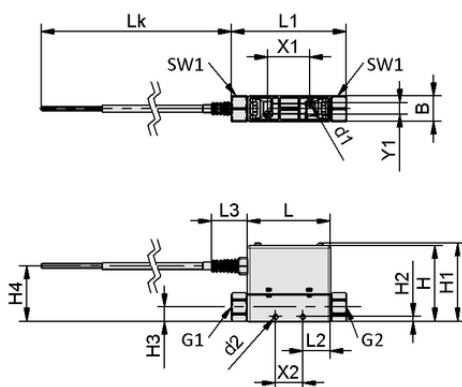

Design data FS 10 D 2NA K



Art.-Nr.: 10.06.04.00003

**Technical data**

Attribute	Value
Construction vacuum switch	2x NPN + 1x analog
Electrical connection	Cable
Protection type IP	IP 40 (with plug)
Measuring range	-1...8bar
Weight	107.00 g
Connection	G1/8"
Product family	FS
Flow in vacuum range	0 ... 10 l/min
Flow in pressure range	0 ... 10 l/min

**Further documentation**CAD data and other documents relating to the article can be found at: www.schmalz.com/10.06.04.00003**Ordering Data Accessories 10.06.04.00003**

Typ		Item number
Mounting bracket	BEF-WIN 33.6x5x40 1	10.06.04.00011

