


Technical data

Attribute	Value
Material hose	PVC with wire spiral
Bending radius min.	85.0 mm
Color	Clear-transparent
Length max.	50.00 m
Pressure range (operating pressure) [bar]	-0.90 ... 5.00 bar
Operating temperature	-15 ... 65 °C
Outside diameter D	19.20 mm
Internal diameter d	13.00 mm

VSL 19-13 PVC-DS KL-TR

Vacuum/compressed air hose VSL is delivered in the desired length.

Available accessories: hose clamp

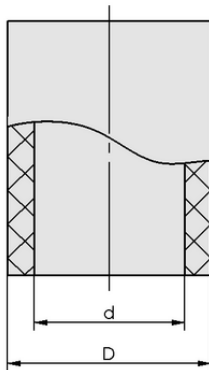

Design data

Attribute	Value
Outside diameter D	19.20 mm
Internal diameter d	13.00 mm

Design data VSL 19-13 PVC-DS KL-TR



Art.-Nr.: 10.07.09.00016

**Technical data**

Attribute	Value
Material hose	PVC with wire spiral
Bending radius min.	85.0 mm
Length max.	50.00 m
Pressure range (operating pressure) [bar]	-0.90 ... 5.00 bar
Operating temperature	-15 ... 65 °C
Weight / Meter	0.190 kg/m
Product family	VSL
Design hose type	19-13

Note: Operating pressure: In reference to media and ambient temperature of + 20 °C Min. bending radius: Referred to the inner side of the hose bend in a static state Max. length: Please indicate the tube length when placing the order!

**Further documentation**

CAD data and other documents relating to the article can be found at: www.schmalz.com/10.07.09.00016

**Ordering Data Accessories 10.07.09.00016**

Typ		Item number
Hose clamp	SSB 12-20 ST-VZ	10.07.10.00159
Hose clamp	SSB 16-27 ST-VZ	10.07.10.00002
Hose sleeve	ST G1/2-AG 13 MS-V	10.08.03.00162
Hose sleeve	ST G1/4-AG 13 MS-V	10.08.03.00158
Hose sleeve	ST G3/4-AG 13 MS-V	10.08.03.00164
Hose sleeve	ST G3/8-AG 13 MS-V	10.08.03.00160

